

## Trittico<sup>®</sup> Executive 183

Combined machine with ionic-system and double inverter for pastry products, chocolate, savoury food and gelato

water cooled



Absolute Creative Freedom

Trittico<sup>®</sup> Executive is the first and only complete laboratory enclosed in just one machine: more than 40 years of innovation in less than 10 square feet. Trittico<sup>®</sup> Executive harbors the unique synergy of ancient experience, craftsmanship, and avantgarde technology in its very heart. For the art of pastry making, chocolate, top quality gelato, and for the highest levels of international cousine.

## **Technical features**

- Ingredients can be added during each heating or freezing phase
- Double inverter for upper tank stirrer with 3 speeds and batch-freezer mixer with 8 speeds
- Sheet resistance heating system: very quick heating process, no thermal hysteresis, high temperature precision, product never burns
- Patented ionic® System control: it detects the right percentage of frozen water in the mixture in order to obtain the proper gelato/ sorbet consistency and volume
- Thermal shock due to fast temperature decrease from 85°C to 4°C: it allows the highest sanitizing of the product and the highest hygiene of the mixture
- $\cdot$  Software programmed with multiple recipes
- Chute for direct extraction

## Advantages and strengths


- · Very easy and convenient product loading
- · Mixing speed can be changed either automatically or manually
- Fast washing operations
- Max hygene
- · Extremely easy to handle and clean



## Trittico Executive 183

Combined machine with ionic-system and double inverter for pastry products, chocolate, savoury food and gelato water cooled

| Model:     |
|------------|
| Quantity:  |
| Project:   |
| Company:   |
| Contact:   |
| Dealer ID: |

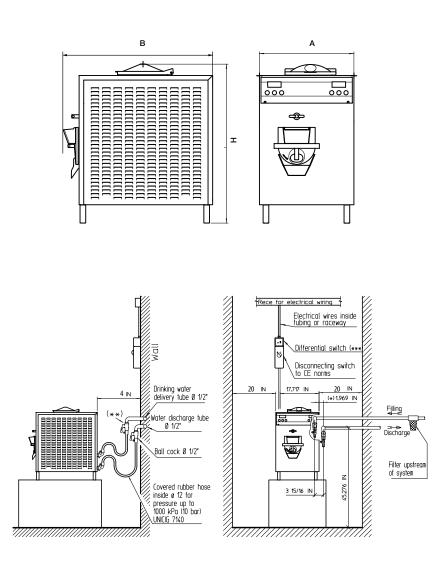

side view

front view

(\*) Even if the machine models vary, the water and electricity connection positions are always the same, i.e. on the LEFT side of the machine. (\*\*) The cock is higher for illustration requirements. In really it must be placed side by side with the other. (\*\*\*) 300 mA (ABB serie K)



Warranty: valid for the North American Continent (Canada, USA) Extension: 12 months parts (with check list and warranty signed and mailed) 5 years compressor with registration on <u>warranty.bravonorthamerica.com</u>

| Width (A)                               | cm   | 50         | inches | 19,7           |
|---|--|------------|--------|----------------|
| Depth (B)                               | cm   | 81         | inches | 32             |
| Height (H)                              | cm   | 84         | inches | 33,1           |
| Weight                                  | kg   | 122        | lbs    | 269            |
| Frame type                              | countertop                                   |            |        |                |
| Outer panels                            | stainless steel                              |            |        |                |
| Capacity per cycle                      | Liters                                       | 3          | Gal    | 0,8            |
| Max. hourly<br>production for<br>gelato | Liters                                       | 18         | Gal    | 4,75           |
| Max. hourly<br>production for<br>pastry | based on the product that has to be produced |            |        |                |
| Min. mix per cyle                       | Kg   | 1,5        | Lbs    | 3,3            |
| Max. mix per cyle                       | Kg   | 2,5        | Lbs    | 5,5            |
| Volume cylinder<br>with mixer           | Liters                                       | 5,7        | Quarts | 6              |
| Volume cylinder<br>without mixer        | Liters                                       | 6,1        | Quarts | 6,5            |
| Stirrer speed                           | 3 speeds from 30 to 110 RPM                  |            |        |                |
| Mixer speed                             | 8 speed from 20 to 240 RPM                   |            |        |                |
| Max power                               | kw   | 5,3        | Hp     | 7,1            |
| Voltage                                 | 230 Volt / 60 Hz / 3 phase                   |            |        |                |
| Running Amps                            | Amp 17,7                                     |            |        |                |
| Breaker size                            | Amp 30                                       |            |        |                |
| Stirrer motor                           | kw   | 0,22       | Нр     | 0,3            |
| Drive motor                             | kw   | 1,1        | Hp     | 1,5            |
| Compressor power                        | kw   | 1,2        | Hp     | 1,6            |
| Compressor power                        | BTU/h 3200                                   |            |        |                |
| Freon R404A                             | Gr   | 1150       | Oz     | 40,5           |
| Refrigeration condensation              | Water  |            |        |                |
| Water connection                        | cm   | 1,27       | inches | 1/2            |
| Min. water pressure                     | bar  | 1,5        | psi    | 20             |
| Max. water pressure                     | bar  | 3          | psi    | 40             |
| Crate dimensions                        | cm   | 100X63X105 | inches | 39,4x24,2x41,3 |
| Crate weight                            | kg   | 170        | lbs    | 374            |

