


Trittico Evo 1020

Revolutionary made in Italy technology
for gelato, pastry and chocolate production
water cooled

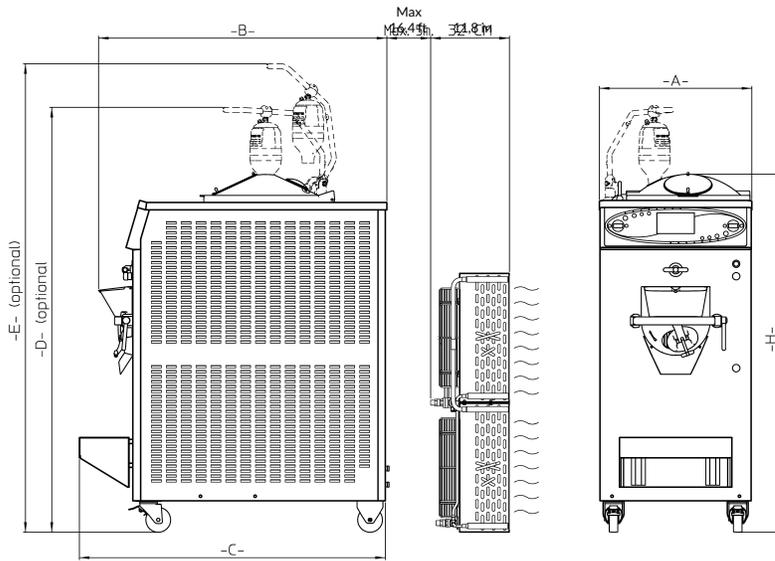

Width (A)	cm	61	inches	24
Depth (B)	cm	115	inches	45.3
Depth with base (C)	cm	122.5 + 30	inches	48.2 + 11.8
Height (H)	cm	144	inches	56.7
Mixer in position (D)*	cm	170	inches	66.9
Lifted Mixer (E)*	cm	188	inches	74

Weight *For air machines the weight is detected at the moment of the shipment.*

Frame type floor model

Outer panels stainless steel

Capacity per cycle	Liters	20	Gal	5.28
--------------------	--------	----	-----	------

Min. mix per cycle	Kg	5	Lbs	8.8
--------------------	----	---	-----	-----

Max. mix per cycle	Kg	16	Lbs	35.3
--------------------	----	----	-----	------

Volume cylinder with mixer	Liters	26.05	Quarts	27.53
----------------------------	--------	-------	--------	-------

Volume cylinder without mixer	Liters	27.63	Quarts	29.20
-------------------------------	--------	-------	--------	-------

Stirrer speed 3 speeds from 30 to 140 RPM

Mixer speed 8 speeds from 20 to 300 RPM

Average power	kw	17.5	Hp	23.5
---------------	----	------	----	------

Voltage 230 Volt / 60 Hz / 3 phase

MCA Amp 98

MOP Amp 175

Stirrer motor	kw	0.37	Hp	0.5
---------------	----	------	----	-----

Drive motor	kw	4.8	Hp	6.4
-------------	----	-----	----	-----

Compressor power	kw	5.2	Hp	7
------------------	----	-----	----	---

Compressor power BTU/h 13624

Freon R404A	Gr	5600	Oz	197.5
-------------	----	------	----	-------

Refrigeration condensation Air + Water

Water connection	Ø		inches	1/2
------------------	---	--	--------	-----

Min. water pressure	bar	2	Psi	29
---------------------	-----	---	-----	----


Max. water pressure	bar	3	Psi	43.5
---------------------	-----	---	-----	------

Crate dimensions machine **	cm	72x123x182	inches	28x48.4x71.7
-----------------------------	----	------------	--------	--------------

Crate weight	kg	545	lbs	1201.5
--------------	----	-----	-----	--------

*** The dimension of the crate for the remote condenser are provided at the moment of the shipment.*

Note: These are indicative for mixture/products or standard testing processor Bravo Spa

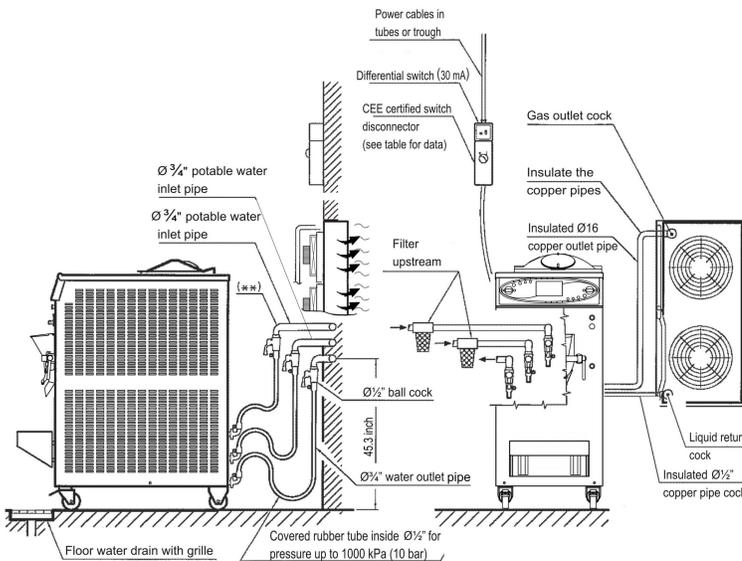

It is advisable to guarantee the work room an air change with the outside with a 14x14 inch grate communicating with the outside or else a perforated "overdoor"

(**) The cock is shown raised only for purposes of illustration. In fact it is next to the other one.

THE CONDENSER CAN ALSO BE PLACED TO THE SIDE OF THE MACHINE

Positioning recommended on window opening to the outside or else to the outside duly protected from the weather. Max. Distance of condenser 98.5 ft



Warranty: valid for the North American Continent (Canada, USA)
Extension: 12 months parts (with check list and warranty signed and mailed)
5 years compressor with registration on warranty.bravonorthamerica.com

