

# Trittico® M 50

combi machine for gelato & ice cream  
hot process production  
air cooled



Easy and fast

Trittico® Mechanic produces gelato in an easy and fast way, in compliance with HACCP regulations, maintaining strict hygiene conditions.

## Technical features

- Dual Mode System, for gelato and premium Ice-cream production
- Cylinder type: patented stainless steel “multi-point” injection system
- Sheet resistance heating system
- Automatic temperature control thanks to advanced thermoregulators with “sensible touch” displays
- Patented internal connection between upper and lower tank
- Refrigeration system: patented stainless steel plate condenser
- Three blade stainless steel mixer with interchangeable scrapers
- Two-speed mixer
- Front door made in Makrolon® (special thermal insulating material)
- Charging hopper allows for a fast charge of the mix, flavors and other ingredients
- Acoustic signal tells you when gelato is ready
- Probe in direct contact with the mix

## Advantages and strengths


- Extremely easy to use
- Consumption saving machine
- Easy mixture loading
- Ingredients can be added during each heating or freezing phase
- Thermal shock due to fast temperature decrease from 85°C to 4°C, allowing the highest hygiene of the mixture
- Short freezing time
- Fast gelato extraction system
- Extremely easy to handle and clean



# Trittico M 50

combi machine for gelato & ice cream  
hot process production  
air cooled

Model: .....  
Quantity: .....  
Project: .....  
Company: .....  
Contact: .....  
Dealer ID: .....

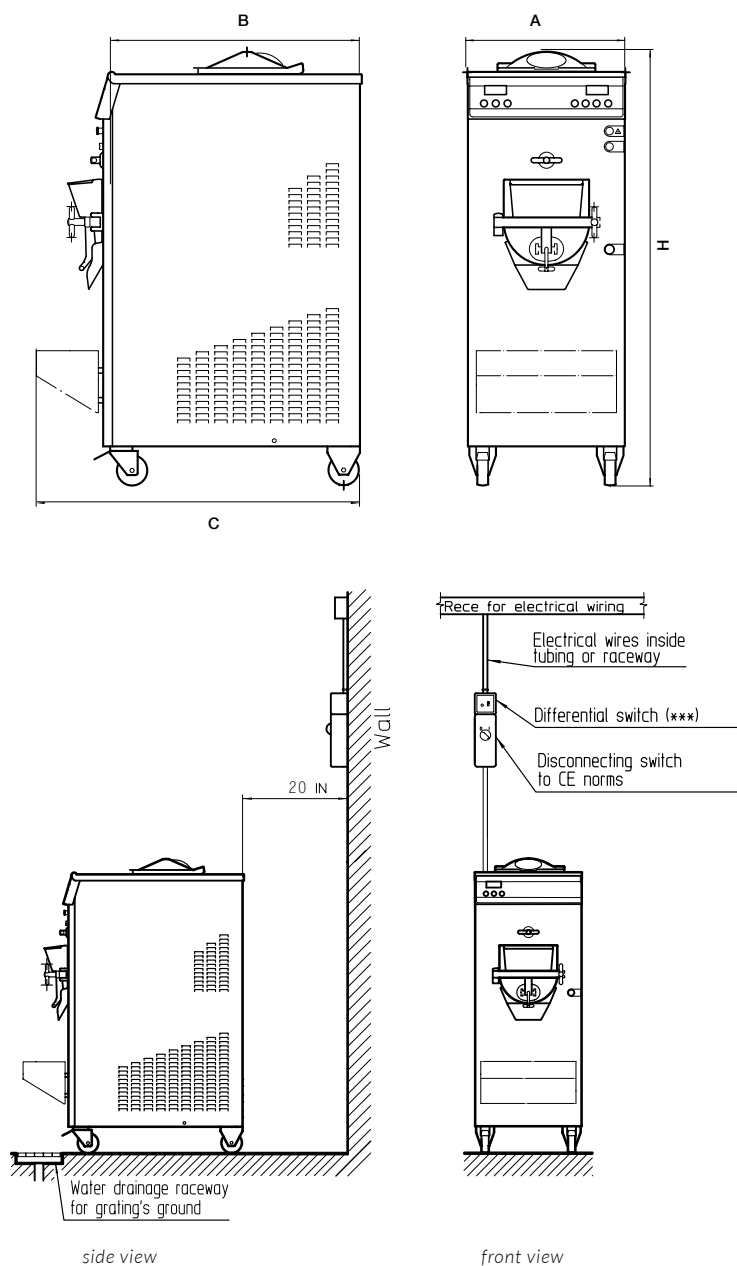

(\*\*\*) 30 mA (ABB serie C).



Warranty: valid for the North American Continent (Canada, USA)  
Extension: 12 months parts (with check list and warranty signed and mailed)  
5 years compressor with registration on [warranty.bravonorthamerica.com](http://warranty.bravonorthamerica.com)

Width (A)	cm	61	inches	24
Depth (B)	cm	95	inches	37,4
Depth with base (C)	cm	102,5	inches	40,4
Height (H)	cm	140	inches	55,1
Weight	kg	295	lbs	642
Frame type	floor model			
Outer panels	stainless steel			
Capacity per cycle	Liters	7	Gal	1,84
Max hourly production	Liters	45	Gal	11,88
Min. mix per cycle	Kg	2,5	lbs	5,5
Max. mix per cycle	Kg	5,5	lbs	12,1
Volume cylinder with mixer	Liters	11,78	Quarts	12,45
Volume cylinder without mixer	Liters	12,42	Quarts	13,12
Min. mixer speed	RPM 122			
Max. mixer speed	RPM 250			
Max power	kw	6,2	Hp	8,3
Voltage	230 Volt/60Hz/3 phase			
Running Amps	Amp 21			
Breaker size	Amp 30			
Stirrer motor	kw	0,22	Hp	0,3
Drive motor	kw	3,3 - 2,2	Hp	4,5 - 3
Compressor power	kw	2,8	Hp	3,75
Compressor power	BTU/h 9349			
Freon R404A	Gr	3000	Oz	105
Refrigeration condensation	Air			
Crate dimensions	cm	110x69x167	inches	43,3x27,1x65,7
Crate weight	kg	375	lbs	826