


Trittico Evo 1020

Revolutionary made in Italy technology
for gelato, pastry and chocolate production
air + water cooled

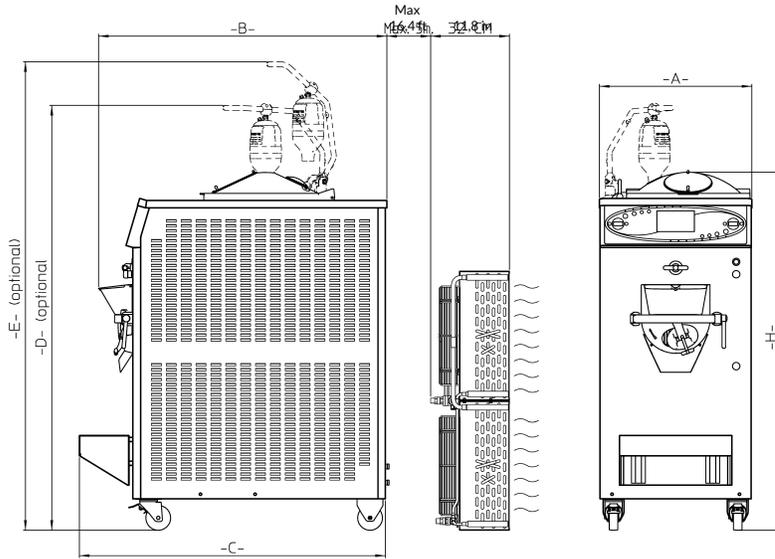


Width (A)	cm	61	inches	24
Depth (B)	cm	115	inches	45.3
Depth with base (C)	cm	122.5	inches	48.2
Height (H)	cm	144	inches	56.7
Mixer in position (D)*	cm	170	inches	66.9
Lifted Mixer (E)*	cm	188	inches	74

Frame type	floor model			
Outer panels	stainless steel			
Capacity per cycle	Liters	20	Gal	5.28
Min. mix per cycle	Kg	8	Lbs	17.6
Max. mix per cycle	Kg	16	Lbs	35.3
Volume cylinder with mixer	Liters	26.05	Quarts	27.53
Volume cylinder without mixer	Liters	27.63	Quarts	29.20

Stirrer speed	3 speeds from 30 to 140 RPM			
Mixer speed	8 speeds from 20 to 300 RPM			
Average power	kw	17.9	Hp	24
Voltage	230 Volt / 60 Hz / 3 phase			
MCA	Amp 98			
MOP	Amp 175			
Stirrer motor	kw	0.45	Hp	0.61
Drive motor	kw	4.8	Hp	6.4
Compressor power	kw	5.2	Hp	7

Compressor power	BTU/h 13624			
Freon R449A	Gr	5600	Oz	197.5
Refrigeration condensation	Air + Water			
Water connection	Ø		inches	1/2
Min. water pressure	bar	2	Psi	29
Max. water pressure	bar	3	Psi	43.5
Crate dimensions machine **	cm	131x80x190	inches	51.6x31.5x74.8
Crate weight	kg	570	lbs	1256.6

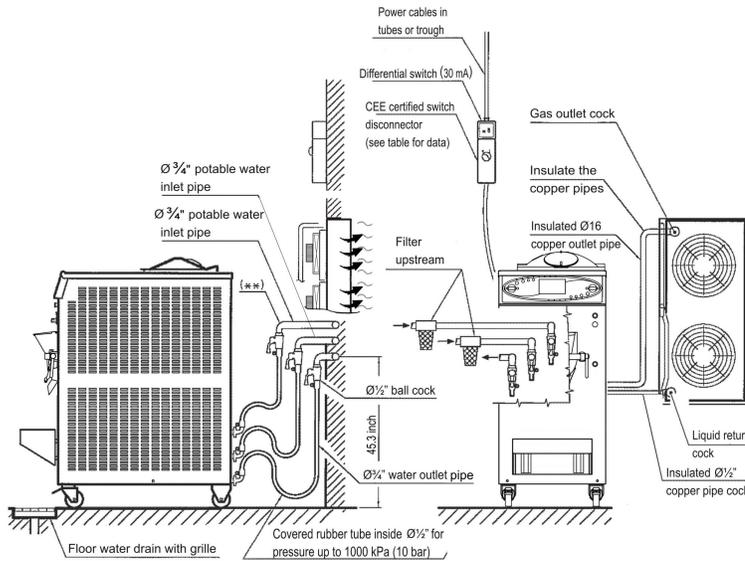

It is advisable to guarantee the work room an air change with the outside with a 14x14 inch grate communicating with the outside or else a perforated "overdoor"
(**) The cock is shown raised only for purposes of illustration. In fact it is next to the other one.

THE CONDENSER CAN ALSO BE PLACED TO THE SIDE OF THE MACHINE

Positioning recommended on window opening to the outside or else to the outside duly protected from the weather. Max. Distance of condenser 98.5 ft



Warranty: valid for the North American Continent (Canada, USA)
Extension: 12 months parts (with check list and warranty signed and mailed)
5 years compressor with registration on warranty.bravonorthamerica.com

* Optional
** The dimension of the crate for the remote condenser are provided at the moment of the shipment.

Note: These are indicative for mixture/products or standard testing processor Bravo Spa

